

LOWBOY LBD65AM

TTP
**TRUCK
TRAILER
PROS**



GENERAL SPECS

- Tare Weight : Approximately 26,500 lb.
- GVWR : 134,000 lb
- Floor : 2 inches Wood
- Cross Member : Fabricated steel
- Upper Coupler Assembly : 5/16" thick pick-up plate
- Fifth Wheel Height : 48 inches
- Mud Flaps : 24" × 24" black plastic, 4 hole mounting
- Kingpin Location : 14 inches from rear face of front bolster.
- Electrical System : 12 volt, 7-way split pin receptacle plug
- Gooseneck Beams : Hydraulic detachable gooseneck


DIMENSIONS

- Overall Width : 102 inches
- Overall Length : 61 feet 1.32 inches
- Flip 4th Axle Length : 5 feet 3.4 inches
- Bed Length : 26 feet
- Bed Height : 28 inches
- 2nd king pin Length : 34 inches

HYDRAULIC POWER SOURCE:

- Engine : Honda GX390
- Horse Power : 13 HP
- Fuel : Gasoline
- Starter : Electric and Manual
- Pump : 3600 psi
- Displacement : 0.4 cu in / rev
- Reservoir : Self Hydraulics Reservoir

TTP
TRAILERS

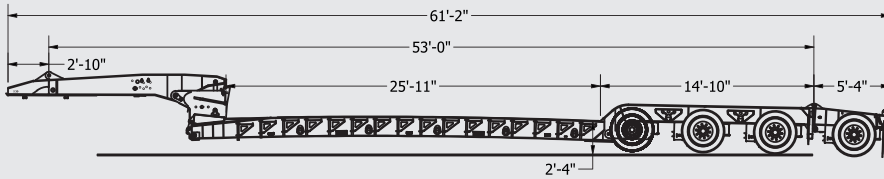

LIGHTING

- Light Attachment : Flange mounted
- Light Type : LED

BRAKES

- Drum : Steel outboard mounted
- Lubrication: Synthetic Grease
- Brake System Type : 4S2M
- Brake Chambers : 30/30

WHEELS

- Rims : 8.25" × 22.5"
- Tire Size : 255/70R22.5
- Hub Type : Aluminium

AXLES

- Axle Type : 5" round, tapered, 77.5" long
- Axle Quantity : Three
- Fourth axle : Flip 4th axle
- Axle Centers : 60 inches
- Axle Location : 31 inches from rear

SUSPENSION

- Suspension Type : Air Suspension

FINISH

- Metal Preparation : Clean, dry steel and commercial blast cleaning
- Primer : Zinc-rich primer
- Topcoat : Urethane



Truck Trailer Pros
(210) 760-0509

Info@TruckTrailerPros.com
TruckTrailerPros.com