

STEPDECK

2 AXLE



GENERAL SPECS

- Tare Weight : Approximately 12,800 lb.
- GVWR : 75,000 lb
- Floor : Wood at 1 1/2"
- Cross Member: Fabricated steel
- Upper Coupler Assembly: 5/16" thick pick-up plate
- Fifth Wheel Height: 48 inches
- Mud Flaps : 24" x 24" black plastic, 4 hole mounting
- Electrical System : 12 volt, 7-way split pin receptacle plug
- Wincher : 4" Slider Wincher System
- Tail : Spring assisted

DIMENSIONS

- Overall Width : 102 inches
- Overall Length : 53 feet
- Bed Height : 41 inches
- Deck Height : 56 inches


LANDING GEAR

- Landing Gear : Two speed, square leg. 60,000 lb. lift capacity and 170,000 lb. static load capacity.
- Landing Gear Foot Group : 10" x 9.5" low profile sandshoe
- Crank Handle Location : Roadside

LIGHTING

- Light Attachment : Flange mounted
- Light Type : LED



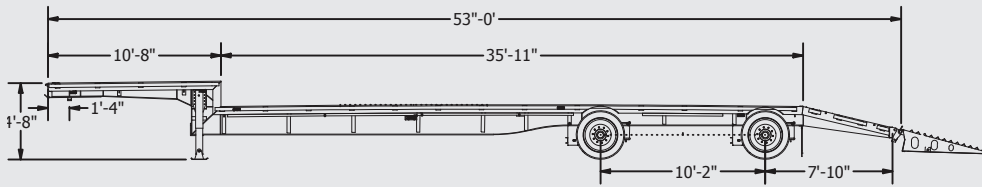

BRAKES

- Drum : Steel outboard mounted
- Lubrication : Synthetic Grease
- Brake System Type : 2S1M
- Brake Chambers : 30/30

WHEELS

- Rims : 8.25" × 22.5"
- Tire Size : 255/70R22.5
- Hub Type : Steel

AXLES

- Axle Type: 5" round, tapered, 77.5" long
- Axle Quantity: Two
- Axle Centers: 122 inches
- Axle Location: 94 inches from rear
- Kingpin Location: 16 inches from rear face of front bolster.

SUSPENSION

- Suspension Type : Air Suspension

FINISH

- Metal Preparation : Clean, dry steel and commercial blast cleaning
- Primer : Zinc-rich primer
- Topcoat : Urethane



Truck Trailer Pros
(210) 760-0509

Info@TruckTrailerPros.com
TruckTrailerPros.com