






**TRUCK
TRAILER
PROS**

HYDRAULIC DETACHABLE GOOSENECK



TTSA
TRAILERS

LBD65 2+3+2

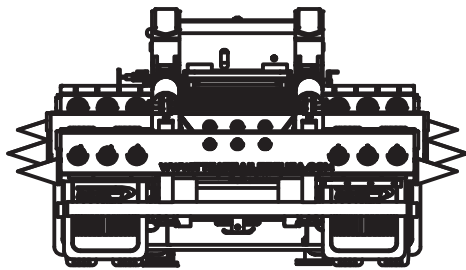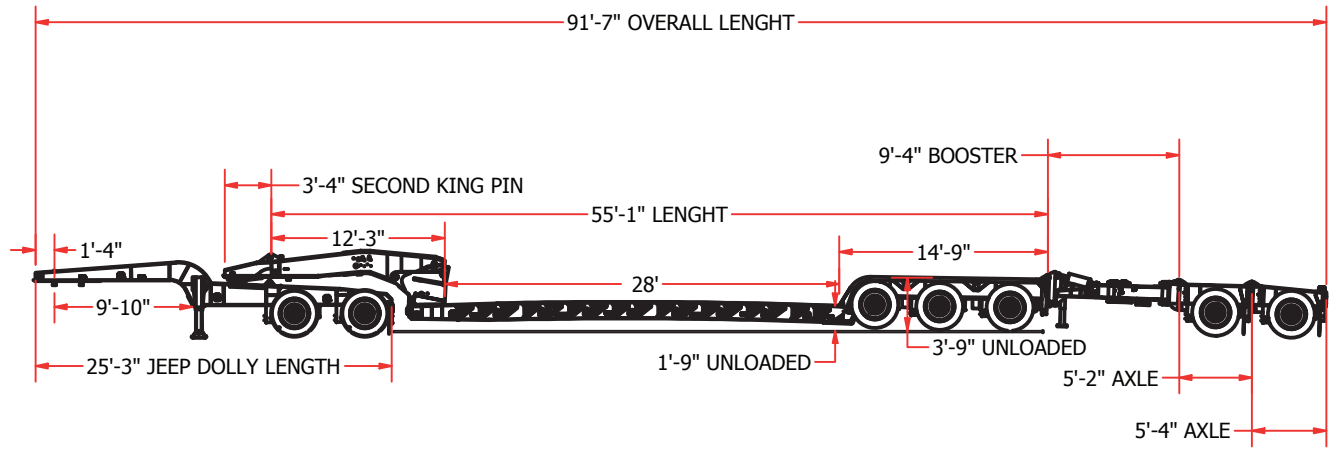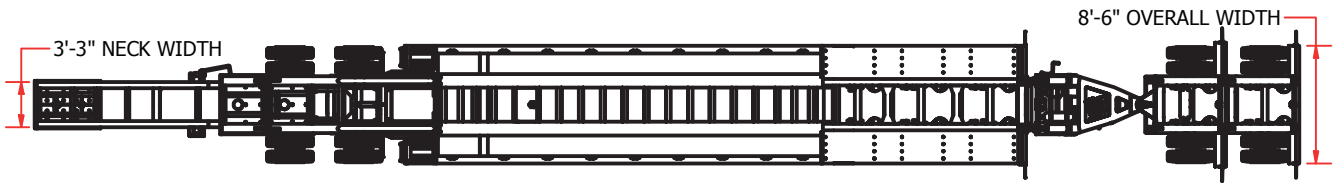

LBD65 2+3+2

DIMENSIONS

Overall Width	8 feet 6 inches
Overall Length	91 feet 7 inches
Booster Length	19 feet 10 inches
Jeep Dolly Length	25 feet 10 inches
Bed Length	28 feet
Bed Height	21 inches
2nd king pin Length	40 inches
Number of axles	7
Set Up	2-3-2
Tare Weight	40, 730 Lbs +/- 3%
Frame Rating	143,000 lbs
GVWR	184, 000 Lbs

STANDARD FEATURES

Main Beams	T1 Steel
Cross Member	Fabricated steel
Upper Coupler Assembly	3/8" thick pick-up plate
Fifth Wheel Height	48 inches
Mud Flaps	24" x 24" black plastic, 4 hole mounting
Kingpin Location	14 inches from rear face of front bolster.
Electrical System	12 volt, 7-way split pin receptacle plug
Floor	2 inches Apitong Wood
Gooseneck	Hydraulic detachable gooseneck
Hydraulic Power Source	Honda GX390
Rims	8.25" x 22.5" Aluminum
Tire Size	295/75R22.5
Hub Type	Steel
Axle Type	5" round, tapered, 77.5" long
Axle Centers	60 inches
Suspension Type	Air Suspension
Brake System	Valve system for service brakes. 4S2M BENDIX ABS system
Metal Preparation	Clean, dry steel and commercial blast cleaning
Primer	Zinc-rich primer
Topcoat	Urethane



LBD65 2+3+2



**TRUCK
TRAILER
PROS**

Truck Trailer Pros
(210) 760-0509
Info@TruckTrailerPros.com

TruckTrailerPros.com